
SWG2UP16POE Series

18-port Full Gigabit Unmanaged PoE Switch , 16*10/100/1000M PoE ports and 2*10/100/1000M Uplink RJ45 Port



Features

■ Full gigabit port

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ◇ Provide Gigabit Ethernet ports and dual RJ45 ports uplink for flexible networking and meets the networking requirements of various scenarios.

■ Intelligent PoE power supply

- ◇ IEEE802.3af/at PoE standard, without damaging non-PoE devices.
- ◇ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.
- ◇ 16*10/100/1000Base-T RJ45 ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.

■ Stable and reliable, easy to use

- ◇ CCC, CE, FCC, RoHS.
- ◇ Low power consumption, galvanized steel casing.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link, PoE.

-
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.

Introduction

The SWG2UP16POE is a full gigabit unmanaged PoE switch. It has 16*10/100/1000Base-T PoE ports and 2*10/100/1000Base-T uplink RJ45 ports. Port 1-16 can support IEEE802.3af/at PoE standard. Single-port PoE power up to 30W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, video access control intercom, etc. through a network cable to meet the network environment that needs a high-density PoE power supply. It is suitable for hotels, campuses, factory quarters, and small and medium-sized enterprises to form an economy efficient network. Unmanaged mode, plug and play, no configuration, easy to use.


Specification

Model	SWG2UP16POE
Interface Characteristics	

Fixed Port	16*10/100/1000Base-T PoE ports (Data/Power) 2*10/100/1000Base-T uplink RJ45 ports (Data)
Ethernet Port	Port 1-16 support 10/100/1000Base-T auto-sensing, full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3, 4, 5 UTP(≤100 meters) 100BASE-TX: Cat5 or later UTP(≤100 meters) 1000BASE-T: Cat5e or later UTP(≤100 meters)
Chip Parameter	
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T, IEEE802.3x
Forwarding Mode	Store and Forward(Full Wire Speed)
Switching Capacity	36Gbps (Non-blocking)
Forwarding Rate@64byte	26.78Mpps
MAC	2K
Buffer Memory	2M
Jumbo Frame	9.2k
LED Indicator	Power: PWR (Green), Network: Link (Green), PoE: PoE (Green)
PoE & Power Supply	
PoE Port	Port 1 to 16
Power Supply Pin	1/2(+) 3/6(-)
Max Power Per Port	30W, IEEE802.3af/at
Total PWR / Input Voltage	250W/ (AC100-240V)
Power Consumption	Standby <13W, Full load <250W
Power Supply	Built-in power supply, AC100~240V 50-60Hz 5.0A
Physical Parameter	
Operation TEMP /	-20~+55°C, 5%~90% RH Non condensing

Humidity	
Storage TEMP / Humidity	-40~+75°C, 5%~95% RH Non condensing
Dimension (L*W*H)	270*181*44.5mm
Net /Gross Weight	<1.25kg / <1.6kg
Installation	Desktop, 19 inch 1U cabinet
Certification & Warranty	
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	1 year, lifelong maintenance.

Dimension

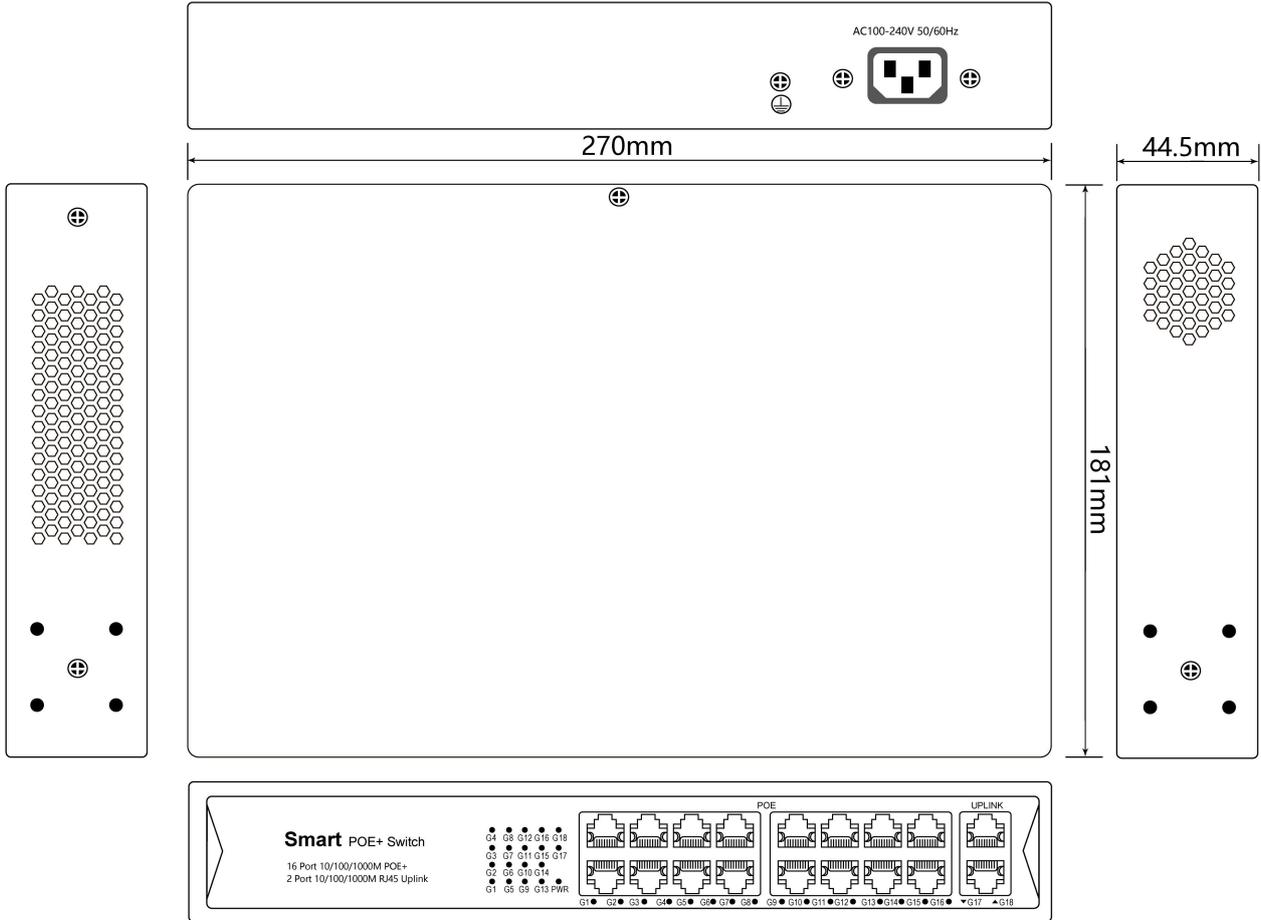

Ordering Information

Model	Description
SWG2UP16POE	Unmanaged PoE switch, 16*10/100/1000M PoE ports+2*10/100/1000M RJ45 ports. built-in 250W power supply, support IEEE802.3af/at PoE standard, compatible with 19-inch cabinet installation.

Packing List

Packing List	Content	Qty	Unit
	18-port full gigabit PoE switch	1	SET
	AC Power Line	1	PC
	Hardware Mounting Kit	1	SET
	User Guide	1	PC
	Warranty Card	1	PC